


- TREE SYMBOLS**
- ASH TREE
 - BAY TREE
 - CEDAR TREE
 - ELM TREE
 - GUM TREE
 - HACK BERRY TREE
 - HICKORY TREE
 - HOLLY TREE
 - MAPLE TREE
 - MULBERRY TREE
 - OAK TREE
 - PALM TREE
 - SYCAMORE TREE
 - SUGAR BERRY TREE
 - WILLOW TREE

* INTERIOR PIPING TO BE BLACK IRON SCHEDULE 40. INSTALL PER PLUMBING/ GAS CODES CURRENT EDITION.

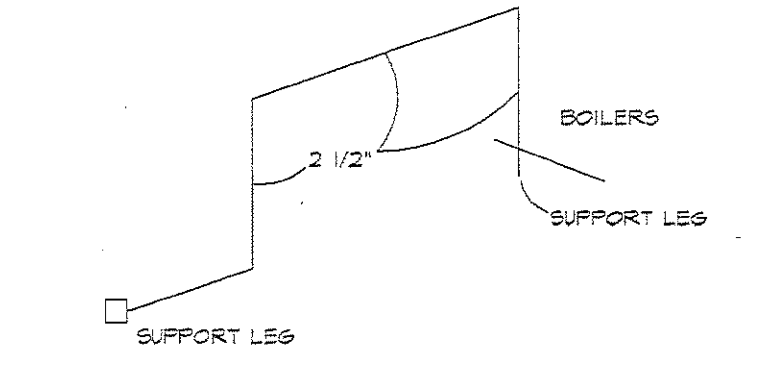

NEW GAS PIPING IN BLDG. SCHEMATIC

| DEPTH FT. | DESCRIPTION | PENETRATION, Blows per Ft. | DEPTH FT. | DESCRIPTION | PENETRATION, Blows per Ft. | DEPTH FT. | DESCRIPTION | PENETRATION, Blows per Ft. |
|--------------|--|-------------------------------|--------------|--|-------------------------------|--------------|--|-------------------------------|
| 0-2 | (1) (2) (3) | 0-10 20 40 60 80 100 | 0-2 | (1) (2) (3) | 0-10 20 40 60 80 100 | 0-2 | (1) (2) (3) | 0-10 20 40 60 80 100 |
| 2-4 | DENSE TO VERY LIGHT GRAY FINE SAND WITH 20% FINE CRUSHED COQUINA SHELL. | | 2-4 | DENSE LIGHT TAN CEMENTED COQUINA. | | 2-4 | VERY FIRM LIGHT GRAY FINE SAND WITH 20% CRUSHED COQUINA SHELL. | |
| 4-19 | FIRM LIGHT GRAY SLIGHTLY SANDY CRUSHED COQUINA SHELL. | | 4-17 | DENSE LIGHT GRAY TO SLIGHTLY SANDY CRUSHED COQUINA SHELL. | | 4-17 | VERY FIRM LIGHT GRAY SANDY FINE CRUSHED COQUINA SHELL. | |
| 19-24 | FIRM GRAY SLIGHTLY CLAYEY FINE SAND WITH CRUSHED COQUINA SHELL. | | 17-21 | FIRM LIGHT GRAY SANDY FINE CRUSHED COQUINA SHELL. | | 17-21 | STIFF GRAY FINE SANDY CLAY WITH TRACES OF CRUSHED COQUINA SHELL. | |
| 24-31 | VERY DENSE TO DENSE LIGHT GRAY FINE SAND WITH TRACES OF CRUSHED COQUINA SHELL. | | 21-31 | (1) DARK GRAY SLIGHTLY ORGANIC FINE SAND. (2) LIGHT TAN MEDIUM TO FINE SANDY CLAY. | | 21-31 | DENSE LIGHT GRAY SANDY FINE CRUSHED COQUINA SHELL. | |
| | BOILING TERMINATED | | | BOILING TERMINATED | | | BOILING TERMINATED | |

- BORING 1**
- (1) DARK GRAY SLIGHTLY ORGANIC FINE SAND.
 - (2) LIGHT TAN FINE SANDY CLAY.
 - (3) LIGHT TAN SANDY CLAY WITH CEMENTED COQUINA.
 - (4) FIRM LIGHT GRAY SLIGHTLY CLAYEY FINE SAND WITH SMALL CEMENTED SAND PEBBLES.

- BORING 2**
- (1) DARK GRAY SLIGHTLY ORGANIC FINE SAND.
 - (2) LIGHT TAN MEDIUM TO FINE SANDY CLAY.
 - (3) LIGHT TAN CEMENTED COQUINA.

- BORING 3**
- (1) DARK GRAY SLIGHTLY ORGANIC FINE SAND.
 - (2) LIGHT TAN MEDIUM TO FINE SANDY CLAY.
 - (3) LIGHT TAN CEMENTED COQUINA.
 - (4) VERY FIRM LIGHT GRAY CLAYEY MEDIUM TO FINE SAND WITH SMALL CEMENTED SAND POSSIBLE.

SOIL TEST BORINGS

PENETRATION* IS NUMBER OF BLOWS OF 140 LB HAMMER FALLING 30" REQUIRED TO PENETRATE 15" SAMPLE 1 FOOT.
 * WATER TABLE (AS OF 15 JULY 1968, TEST DATE)
 TESTS BY LAW ENGINEERING TESTING COMPANY, JACKSONVILLE, FLA. (JOB NO. 0-297)

PARTIAL SITE PLAN - NEWSPRINT STORAGE BUILDING
 SCALE: 1" = 30'-0"

NOTE: SYMBOL INDICATES ORIGINAL SOIL BORING 15-JULY-1968

HAWKINS, HALL & OGLE ARCHITECTS, INC.
 208 MAGNOLIA AVENUE
 DAYTONA BEACH, FLORIDA 32114
 TEL (386) 255-6163 FAX (386) 251-5650

**NEW WAREHOUSE ADDITION
 DAYTONA BEACH NEWS JOURNAL**

| | | |
|------------|-------------------------------|-----------------------|
| NO. ▲ | REVISION/ SUBMISSIONS | DATE |
| | | |
| | | |
| | | |
| SHT. TITLE | PARTIAL SITE PLAN | |
| SEAL | COMMISSION NO. 1010 | SCALE: 1" = 30'-0" |
| | DRAWN: JEH | SHEET NO. |
| | CHECKED: | A10 |
| | DATE: 9-JULY-10 | OF |