SANITARY SEWER CONSTRUCTION & DESIGN STANDARDS

1. THE CITY'S UTILITIES DEPARTMENT SHALL BE GIVEN A MINIMUM OF 2 BUSINESS DAYS ADVANCE NOTICE (NOT INCLUDING HOLIDAYS) PRIOR TO BEGINNING ANY SANITARY SEWER CONSTRUCTION.
2. ALL DEWATERING ACTIVITIES EITHER DIRECTLY DISCHARGED OR THAT SUBSEQUENTLY USE THE CITY'S STORMWATER SYSTEM TO CONVEY GROUND OR SURFACE WATER FROM A SITE SHALL REQUIRE A STANDARD OR GENERAL USE PERMIT AS PER ARTICLE 7 SECTION 7 OF THE LAND DEVELOPMENT CODE. A PERMIT SHALL BE REQUIRED PRIOR TO ENGAGING IN ANY DEWATERING ACTIVITIES, OR IN ANY CONSTRUCTION ACTIVITIES. DEWATERING ACTIVITIES INCLUDE THE REMOVAL OF GROUND WATER FROM A CONSTRUCTION SITE, ENCLOSED VAULT, COFFERDAM, OR TRENCHES ALLOWING CONSTRUCTION OR MAINTENANCE TO BE DONE IN THE DRY, OR ANY ACTIVITY WHICH CHANGES THE IMPERVIOUS AREA OF LAND. SITE SPECIFIC PERMITS SHALL REQUIRE THE PAYMENT OF A PER ACRE FEE BASED ON THE SIZE OF THE DEVELOPMENT. GENERAL PURPOSE PERMITS SHALL REQUIRE THE PAYMENT OF AN ANNUAL FEE BASED ON ROUTINE SCHEDULE OF MAINTENANCE ACTIVITIES DISCHARGING DIRECTLY OR SUBSEQUENTLY INTO THE CITY'S MS4. DEWATERING PERMIT APPLICATIONS MAY BE FOUND AT http://codb.us/files/pnl/forms/generaldewatering. FEES ARE SUBJECT TO ARTICLE 2D SECTION 3.1 OF THE LAND DEVELOPMENT CODE AND MUST BE SUBMITTED TO THE CITY OF DAYTONA BEACH UTILITY DEPARTMENT AT 125 BASIN STREET SUITE 100, DAYTONA BEACH FL 32114 BEFORE ANY USE OF THE MS4 WILL BE ALLOWED. FAILURE TO COMPLY WILL RESULT IN THE TERMINATION OF ACCESS TO THE CITY'S MS4 SYSTEM.
3. UPON COMPLETION, THE CONTRACTOR SHALL PROVIDE THE CITY UTILITIES DEPARTMENT WITH A CCTV INSPECTION LOG ON DVD AND A PRINTED REPORT FOR ALL GRAVITY MAINS AND LATERALS CONSTRUCTED. ALL WORK, WITH THE EXCEPTION OF FINAL GRADE ADJUSTMENT TO THE MANHOLES, SHALL BE COMPLETED PRIOR TO COMMENCING THE CCTV INSPECTION. THE CONTRACTOR SHALL COORDINATE THE CCTV INSPECTION TIME WITH THE CITY UTILITY INSPECTOR PRIOR TO INITIATING THE WORK. FINAL PAVING SHALL NOT COMMENCE UNTIL APPROVAL HAS BEEN RECEIVED FROM THE CITY UTILITY INSPECTOR.
4. SEWER LATERALS LOCATIONS SHALL BE MARKED ALONG THE OUTSIDE OF THE CURB WITH A SAW CUT "V", OR BY A METAL TAB SET INTO THE PAVEMENT.
5. THE CONTRACTOR SHALL BE REQUIRED TO PIG ALL FORCE MAINS EQUAL TO OR GREATER THAN 6" IN DIAMETER AND PRIMARY TRANSMISSION MAINS LOCATED ON COLLECTOR AND ARTERIAL ROADWAYS. LAUNCHING AND EXTRACTION POINTS SHALL BE DETERMINED BY THE CITY.
6. WITH RESPECT TO TIE-IN CONNECTIONS AND CORING OPERATIONS, THE CITY RESERVES THE RIGHT TO REQUIRE CONNECTIONS TO BE PERFORMED DURING PERIODS OF LOW FLOW (MIDNIGHT TO 6:00 A.M.) IN ORDER TO MINIMIZE SERVICE DISRUPTION TO EXISTING CUSTOMERS.
7. ALL WORK PERFORMED UPON SANITARY SEWER FACILITIES OWNED OR PROPOSED TO BE OWNED BY THE CITY SHALL BE CONSTRUCTED BY A LICENSED UNDERGROUND UTILITY CONTRACTOR OR LICENSED GENERAL CONTRACTOR, WHO IS LICENSED IN THE STATE OF FLORIDA AND REGISTERED WITH THE CITY.
8. UPON CONSTRUCTION COMPLETION AND ACCEPTANCE OF THE SYSTEM, IT SHALL BE THE DESIGN ENGINEER'S RESPONSIBILITY TO ENSURE THAT THE SYSTEM IS PROPERLY CERTIFIED AND ACCEPTED BY THE FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION AND AS-BUILTS ARE PROVIDED TO THE CITY'S UTILITIES DEPARTMENT PRIOR TO ANY USE OF THE SYSTEM.
9. FOR CONSTRUCTION PURPOSES, THE PLANS SHALL DIMENSION THE LOCATION OF ALL FORCE MAINS, VALVES, MANHOLES & LATERALS FROM THE BASELINE CONSTRUCTION AND FROM RIGHT-OF-WAY LINE.
10. LANDSCAPE PLANS SHALL CLEARLY DEPICT THE DESIGN LOCATION OF PLANTINGS RELATIVE TO THE LOCATION OF PUBLIC UTILITIES AND STORM WATER INFRASTRUCTURE IN ORDER TO EVALUATE POTENTIAL CONFLICTS.
11. ALL SANITARY STANDARD DETAILS SHALL APPLY TO ALL CONSTRUCTION WORK PERFORMED IN THE CITY OF DAYTONA BEACH BY REFERENCE IN THESE NOTES (S-1 TO S-16).
12. ALL PLUG VALVES SHALL BE IDENTIFIED AS SUCH WITH AN ENGRAVED BRASS 2" x 6" NAME PLATE EMBEDDED IN SURFACE OF CONCRETE COLLAR.
13. FOR AS-BUILTS INFORMATION SEE THE CITY'S AS-BUILT DRAWING REQUIREMENTS ATTACHED TO THE BACK OF THE UTILITIES DEPARTMENT'S STANDARD DETAILS.

THE CITY OF DAYTONA BEACH UTILITIES DEPARTMENT — SANITARY SEWER CONSTRUCTION & DESIGN STANDARDS S-1A

FY:	09/10
Drawing Date:	01/08
Drawn By:	NJH
Checked By:	JMP
Scale:	NTS
Revision Date:	06/10
File Name:	S-1A

SANITARY SEWER CONSTRUCTION & DESIGN STANDARDS (CONT'D)

14. ALL LIFT STATION WETWELL FASTENERS AND THROUGH-TOP CONNECTORS THAT CONTACT THE WETWELL (SUCH AS NIPPLES) SHALL BE 316 SS FASTENERS.
15. ALL GRAVITY SANITARY SEWER MAIN LINES SHALL BE 8" DIAMETER MINIMUM. COMMERCIAL SERVICE LATERALS ALL SHALL BE GREEN 6" DIA. OR LARGER. ALL SINGLE FAMILY RESIDENTIAL SERVICE LATERALS SHALL BE 6" – SINGLE SERVICES WITH CLEAN OUTS INSTALLED AT PROPERTY LINE.
16. ALL GRAVITY SANITARY SEWER MAIN LINES SHALL BE GREEN PVC SDR-26, ASTM D-3034, OR C-900 DR-25 MINIMUM PRESSURE CLASS 100. IN PLACES WHERE A MINIMUM COVER OF 4.0' CANNOT BE MAINTAINED OR IN DEPTHS OF TEN (10) FEET OR GREATER C-900 OR C-905 GREEN PVC DR-25. MINIMUM PRESSURE CLASS 100 SHALL BE USED.
17. FOR SINGLE FAMILY HOMES, SINGLE SIX INCH SEWER SERVICES LATERALS SHALL BE CONSTRUCTED AT EACH LOT OR UNIT AND LOCATED ON THE DOWNSTREAM SIDE OF THE LOT CENTER LINE. THESE SERVICES SHALL BE EXTENDED 4 FEET ABOVE GROUND AT THE PROPERTY LINE WITH A PVC RISER AND PLUG BEING EASILY VISIBLE FROM THE ROAD. RUBBER SEAL FITTINGS SHALL BE USED ON ALL LINES. NO GLUED JOINTS ARE PERMITTED ON LATERALS.
18. FOR MULTI-FAMILY AND COMMERCIAL SITES, SIX INCH MINIMUM SEWER SERVICES AND CLEANOUTS SHALL BE PROVIDED AS APPROVED BY THE CITY.
19. ALL SANITARY SEWER FORCE MAINS, INCLUDING FITTINGS, SHALL BE DUCTILE IRON PIPE (D.I.P.), EPOXY LINED, CLASS 350. FORCE MAIN MINIMUM DEPTH OF COVER SHALL BE 36". ALL FORCE MAINS SHALL BE DISTINCTLY MARKED BY A GREEN STRIPE OR COLORED GREEN. ALL NON DIP HORIZONTAL DIRECTIONAL DRILL FORCE MAINS SHALL HAVE A MINIMUM WORKING PRESSURE RATING OF 160 PSI. THE CITY MAY REQUIRE A HIGHER PRESSURE RATING DEPENDENT ON SITE CONDITIONS.
20. ALL SANITARY SEWER FORCE MAINS SHALL USE A THRUST RESTRAINT JOINT METHOD IN COMPLIANCE WITH THE DUCTILE IRON PIPE RESEARCH ASSOCIATION GUIDELINES. IN NO INSTANCE SHALL THRUST BLOCKS BE PERMITTED.
21. AS A GENERAL RULE, THE NUMBER OF JOINTS SHALL BE LIMITED WHENEVER POSSIBLE. IN SPECIAL CASES WHERE A POINT REPAIR TO AN 8" TO 12" PVC SEWER MAIN IS REQUIRED, THE PROPER RIGID WRAP AROUND SLEEVE MAY BE ALLOWED BY SPECIAL APPROVAL BY THE CITY.
22. ALL IN-LINE SANITARY SEWER FORCE MAIN VALVES SHALL BE RESILIENT SEAT GATE VALVES UNLESS OTHERWISE NOTED. VALVES SHALL BE SPACED A MAXIMUM OF 1000 FEET APART UNLESS OTHERWISE APPROVED BY THE CITY.
23. ALL C-900 PVC PIPE REQUIREMENTS ARE REFERENCED TO THE C-900-97 STANDARDS. OR UPGRADES FOR BURST PROTECTION MAY BE REQUESTED WHEN USING THE C-900-07 STANDARDS.
24. MINIMUM GRAVITY SANITARY SEWER SLOPES ARE AS FOLLOWS:
    8" PIPE 0.40 %
    12" PIPE 0.22 %
    OR OTHERWISE NOTED BY THE UTILITIES DEPARTMENT.
25. GRAVITY SANITARY SEWER LINES SHALL BE INSTALLED WHENEVER POSSIBLE UNDER PAVED AREAS THEN PUBLIC RIGHT-OF-WAYS. UTILITY EASEMENTS SHALL BE PROVIDED WHENEVER PUBLICLY-OWNED SEWER LINES ARE CONSTRUCTED OUTSIDE OF A PUBLIC RIGHT-OF-WAY.
26. GRAVITY SANITARY SEWER LINE CONSTRUCTION SHALL BE ACCOMPLISHED BY THE USE OF A LASER INSTRUMENT UNLESS ANOTHER METHOD IS PREVIOUSLY APPROVED BY THE CITY.
27. THE CONTRACTOR SHALL AT ALL TIMES, DURING PIPE LAYING OPERATIONS, DEWATER THE GROUND SUFFICIENTLY TO KEEP THE GROUNDWATER ELEVATION A MINIMUM OF 6" BELOW THE PIPE BEING LAID WITHIN THE AREA OF THE TRENCH.
28. ALL PIPES SHALL BE LAID ON A FIRM FOUNDATION. SOFT OR SPONGY BEDDING FOR PIPES IS NOT ACCEPTABLE. ANY UNSUITABLE MATERIAL SHALL BE REMOVED AND REPLACED WITH A DRY, COMPACTED, GRANULAR MATERIAL SATISFACTORY TO THE CITY.
29. ON ALL EXCAVATION AND BACKFILLING THE CONTRACTOR SHALL PROVIDE ADEQUATE SHEETING AND BRACING IN ORDER TO PROVIDE FOR THE SAFETY OF WORKERS, AS WELL AS REPRESENTATIVES OF THE CITY, THE DESIGN ENGINEER, AND THE DEVELOPER.
30. ALL TRENCHES SHALL BE BACKFILLED WITH ACCEPTABLE MATERIAL AND COMPACTED TO THE MAXIMUM DENSITY COMPACTION (95% IN UNPAVED AREAS AND 98% IN PAVED AREAS) OF SPECIFIED MINIMUM COMPACTION (95% IN UNPAVED AREAS AND 98% IN PAVED AREAS) OF THE OPTIMUM DENSITY OF THAT MATERIAL BASED ON THE AASHTO T-180 MODIFIED PROCTOR TEST.

THE CITY OF DAYTONA BEACH UTILITIES DEPARTMENT — SANITARY SEWER CONSTRUCTION & DESIGN STANDARDS (CONT'D) S-1B

FY:	09/10
Drawing Date:	01/08
Drawn By:	NJH
Checked By:	JMP
Scale:	NTS
Revision Date:	06/10
File Name:	S-1B

SANITARY SEWER CONSTRUCTION & DESIGN STANDARDS (CONT'D)

31. A THREE INCH METALIZED LOCATOR TAPE SHALL BE USED FOR ALL PRESSURIZED MAINS INSTALLED. THE LOCATOR TAPE SHALL BE NON-CORRODIBLE CONSISTING OF POLYETHYLENE FILM WITH A METALLIC FILM AND SHALL BE CONTINUOUSLY MARKED TO INDENTIFY THE REFERENCED PIPELINE. THE TAPE SHALL BE INSTALLED EIGHTEEN INCHES DIRECTLY ABOVE THE PIPE.
32. ALL SEWER LINES WHICH ARE CONSTRUCTED OUTSIDE OF PUBLIC RIGHT-OF-WAYS WITHIN SIDE YARDS, BACKYARDS, AND OTHER POORLY ACCESSIBLE AREAS SHALL BE CONSTRUCTED OF GREEN C-900 PVC. ABSOLUTELY NO USE OF PLASTIC STYRENE FITTINGS SHALL BE ALLOWED.
33. ALL LOCAL COLLECTION SANITARY SEWER MANHOLES SHALL BE PRECAST WITH A MINIMUM INSIDE DIAMETER OF 4 FEET. MANHOLES OVER 8 FEET IN DEPTH SHALL HAVE THE BOTTOM PRE-CAST SECTION AT A MINIMUM OF FOUR FEET TALL.
34. STANDARD MANHOLES SHALL BE LOCATED AT INTERVALS NOT EXCEEDING 400 FEET.
35. ALL SEWER FITTINGS TO BE "HARCO" OR APPROVED EQUAL.
36. MANHOLE RIMS SHALL MATCH FLUSH WITH THE FINISH GRADE ELEVATION IN PAVED AREAS AND A MINIMUM OF 0.5 FEET AND MAXIMUM OF 1.0 FEET ABOVE GRADE GENERALLY IN UNPAVED AREAS.
37. THE CONTRACTOR SHALL CONSTRUCT SANITARY SEWER MANHOLES IN SUCH A WAY THAT SEWER LINES DO NOT INTERSECT SEALED JOINTS BETWEEN SECTIONS OF THE MANHOLE.
38. RUBBER BOOTS AND STAINLESS STEEL BANDS SHALL BE UTILIZED IN THE CONNECTION OF THE SEWER MAIN TO THE MANHOLES (SEE STANDARD MANHOLE AND BOOT DETAIL).
39. INDIVIDUAL SANITARY SERVICE CONNECTORS ON NEW CONSTRUCTION SHALL NOT BE CONNECTED DIRECTLY INTO MANHOLES, AND MUST BE CONNECTED TO SEWER MAIN LINES BY USE OF WYE CONNECTIONS, UNLESS OTHERWISE APPROVED BY THE CITY.
40. SANITARY SEWER DROP MANHOLES SHALL ONLY BE USED UNDER SPECIAL CONDITIONS AS APPROVED BY THE CITY. DROPS LESS THAN 3.0' SHALL NOT BE ALLOWED.
41. ALL SANITARY SEWER MANHOLE COVERS SHALL HAVE THE WORD "SANITARY" CAST INTO THEM AS SHOWN ON DETAIL S-9.
42. SANITARY SEWER MANHOLES WHICH HAVE SEWER FORCE MAINS DISCHARGING DIRECTLY INTO THEM SHALL BE FIBERGLASS OR POLY-ETHYLENE LINED. RETRO-FITTING OF MANHOLES WITH LINERS SHALL BE REQUIRED WHEN NEW CONNECTIONS SUCH AS THIS ARE MADE. FIBERGLASS SHALL BE A MINIMUM 1/2" THICKNESS UNLESS APPROVED OTHERWISE BY THE CITY. OTHER TYPES OF LINING METHODS AND MATERIALS MAY BE CONSIDERED ON A CASE BY CASE BASIS. UNDER SPECIAL CIRCUMSTANCES WHERE HYDROGEN SULFIDE IS A MAJOR CONCERN MANHOLES UPSTREAM AND/OR DOWNSTREAM OF THE FORCE MAIN TIE-IN OR WET WELL MAY ALSO BE REQUIRED TO HAVE LININGS INSTALLED.
43. EZ-WRAP PLASTIC, AS MANUFACTURED BY PRESS SEAL GASKET CORPORATION, SHALL BE USED ON THE OUTSIDE OF ALL MANHOLE AND WETWELL JOINTS. APPLY ONE LAYER OF 9" WRAP CENTERED ON EACH JOINT. A CITY INSPECTOR SHALL PERSONALLY INSPECT ALL JOINT SEALS PRIOR TO BACKFILLING OPERATIONS.
44. ANY NEW OR EXISTING ESTABLISHMENT WITH THE POTENTIAL TO DISCHARGE INDUSTRIAL OR COMMERCIAL WASTES INTO THE SEWER SYSTEM SHALL CONSTRUCT AND MAINTAIN AT HIS EXPENSE A SUITABLE CONTROL MANHOLE, OR MANHOLES, DOWNSTREAM FROM ANY TREATMENT, STORAGE, OR OTHER APPROVED WORKS, PRIOR TO THE CITY'S COLLECTION SYSTEM TO FACILITATE OBSERVATION, MEASUREMENT, AND SAMPLING OF ALL WASTES, INCLUDING ALL DOMESTIC SEWAGE FROM THE ESTABLISHMENT.
45. THE CONTROL MANHOLE OR MANHOLES SHALL BE CONSTRUCTED AT SUITABLE AND SATISFACTORY LOCATIONS MAKING THE MANHOLE ACCESSIBLE TO CITY PERSONNEL AT ALL TIMES FOR SAMPLING.
46. SANITARY SEWER LIFT STATIONS AND FORCE MAINS SIZE, MATERIAL, AND DESIGNS SHALL BE APPROVED BY THE CITY. LIFT STATIONS SHALL BE CONSTRUCTED WITH A MINIMUM WET WELL AS PER THE LIFT STATION DETAIL. A MINIMUM OF 6 FEET SHALL BE MAINTAINED BETWEEN LOWEST INFLUENT INVERT AND WETWELL FLOOR.
47. IT SHALL BE THE RESPONSIBILITY OF THE DESIGN ENGINEER TO PREPARE AND SUBMIT FLOTATION CALCULATIONS TO SIZE THE BASE OF THE WET WELL, AND ANY MANHOLES AS DEEMED NECESSARY BY THE CITY.

THE CITY OF DAYTONA BEACH UTILITIES DEPARTMENT — SANITARY SEWER CONSTRUCTION & DESIGN STANDARDS (CONT'D) S-1C

FY:	09/10
Drawing Date:	01/08
Drawn By:	NJH
Checked By:	JMP
Scale:	NTS
Revision Date:	02/10
File Name:	S-1C

CITY APPROVAL STAMP (DEV2011-107)

SANITARY SEWER CONSTRUCTION & DESIGN STANDARDS

TESTING REQUIREMENTS:

1. THE CONTRACTOR SHALL EMPLOY AN INDEPENDENT TESTING LABORATORY AT HIS OWN EXPENSE TO INSURE THAT COMPACTION OF ALL FILL MATERIAL IS COMPLETED PROPERLY. TESTS SHALL BE DONE ONE FOOT ABOVE THE PIPE AND THEN AT ONE FOOT VERTICAL INTERVALS UNTIL FINAL GRADE IS REACHED. TESTING SHALL BE COMPLETED AND TEST DOCUMENTS SUBMITTED TO THE CITY AT A MINIMUM FREQUENCY OF ONE SET OF TESTS PER EACH 300 FOOT OF PIPING AND ONE ADDITIONAL SET OF TESTS AT EVERY MANHOLE. IDENTIFICATION OF TEST LOCATIONS SHALL BE CLEARLY INDICATED ON TEST REPORTS. TEST RESULTS SHALL BE FORWARDED PROMPTLY TO THE CITY'S DESIGNATED SITE INSPECTOR.
2. ALL TESTING REQUIRED BY THE CITY SHALL BE PAID FOR BY THE CONTRACTOR / DEVELOPER.
3. THE CITY OF DAYTONA BEACH RESERVES THE RIGHT TO REQUIRE THE DEVELOPER TO PERFORM VACUUM TESTING OF ALL SANITARY MANHOLES AND / OR TEST SEWER MAINS.
4. ALL PROPOSED SEWER FORCE MAINS SHALL BE FLUSHED, PRESSURE TESTED AND CLEARED FOR SERVICE IN ACCORDANCE WITH THE FLORIDA DEPARTMENT OF ENVIROMENTAL PROTECTION REQUIREMENTS. THE CONTRACTOR SHALL NOTIFY THE CITY'S DESIGNATED SITE INSPECTOR WHO SHALL COORDINATE WITH CITY PERSONNEL AT THE WASTEWATER TREATMENT PLANT AT LEAST (3) THREE BUSINESS DAYS PRIOR TO BEGINNING A FULL-DIAMETER FLUSH OF THE MAINS PRIOR TO THE COMMENCEMENT OF PRESSURE TESTING. (SUBJECT TO AVAILABILITY).
5. SANITARY SEWER FORCE MAINS SHALL BE PRESSURE TESTED TO 100 PSI FOR 2 HOURS. WITH ALLOWABLE LEAKAGE TO BE X GAL/HR PER X" DIA. OF PIPE, PER X' OF MAIN TO BE TESTED.

ALLOWABLE LEAKAGE PER 1000 FT. OF PIPELINE * -GPH

AVERAGE TEST PRESSURE (PSI)	NOMINAL PIPE DIAMETER – INCHES																AVERAGE TEST PRESSURE (PSI)
	3	4	6	8	10	12	14	16	18	20	24	30	36	42	48	54	60	64	
450	0.48	0.64	0.95	1.27	1.59	1.91	2.23	2.55	2.87	3.18	3.82	4.78	5.73	6.69	7.64	8.60	9.56	10.19	450
400	0.45	0.60	0.90	1.20	1.50	1.80	2.10	2.40	2.70	3.00	3.80	4.50	5.41	6.31	7.21	8.11	9.01	9.61	400
350	0.42	0.56	0.84	1.12	1.40	1.67	1.95	2.25	2.53	2.81	3.37	4.21	5.06	5.90	6.74	7.58	8.43	8.99	350
300	0.39	0.52	0.78	1.04	1.30	1.56	1.82	2.08	2.34	2.60	3.12	3.90	4.68	5.46	6.24	7.02	7.80	8.32	300
275	0.37	0.50	0.75	1.00	1.24	1.49	1.74	1.99	2.24	2.49	2.98	3.73	4.48	5.23	5.98	6.72	7.47	7.97	275
250	0.36	0.47	0.71	0.95	1.19	1.42	1.66	1.90	2.14	2.37	2.85	3.56	4.27	4.98	5.70	6.41	7.12	7.60	250
225	0.34	0.45	0.68	0.90	1.13	1.35	1.58	1.80	2.03	2.25	2.70	3.38	4.05	4.73	5.41	6.03	6.76	7.21	225
200	0.32	0.43	0.64	0.85	1.06	1.28	1.48	1.70	1.91	2.12	2.55	3.19	3.82	4.46	5.09	5.73	6.37	6.80	200
175	0.30	0.40	0.59	0.80	0.99	1.19	1.39	1.59	1.79	1.98	2.38	2.98	3.58	4.17	4.77	5.36	5.96	6.36	175
150	0.28	0.37	0.55	0.74	0.92	1.10	1.29	1.47	1.66	1.84	2.21	2.76	3.31	3.86	4.41	4.97	5.52	5.88	150
125	0.25	0.34	0.50	0.67	0.84	1.01	1.18	1.34	1.51	1.68	2.01	2.52	3.02	3.53	4.03	4.53	5.04	5.37	125
100	0.23	0.30	0.45	0.60	0.75	0.90	1.05	1.20	1.35	1.50	1.80	2.25	2.70	3.15	3.60	4.05	4.50	4.80	100

* IF THE PIPELINE UNDER TEST CONTAINS SECTIONS OF VARIOUS DIAMETERS, THE ALLOWABLE LEAKAGE WILL BE THE SUM OF THE COMPUTED LEAKAGE FOR EACH SIZE.

$$L = \frac{SD\sqrt{P}}{133{,}200}$$

WHERE:
- L = ALLOWABLE LEAKAGE, IN GALLONS PER HOUR
- S = LENGTH OF PIPE TESTED, IN FEET
- D = NOMINAL DIAMETER OF PIPE, IN INCHES
- P = AVERAGE TEST PRESSURE DURING THE LEAKAGE TEST, IN POUNDS PER SQUARE INCH (GAUGE)

THE CITY OF DAYTONA BEACH UTILITIES DEPARTMENT — SANITARY SEWER TESTING REQUIREMENTS NOTES S-1D

FY:	09/10
Drawing Date:	01/08
Drawn By:	NJH
Checked By:	JMP
Scale:	NTS
Revision Date:	07/10
File Name:	S-1D

POTABLE WATER MAIN TO BE CENTERED ABOVE THE CROSSING MAIN FOR MAXIMUM JOINT SEPARATION.

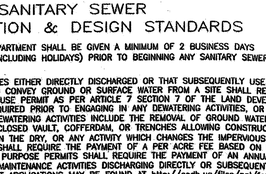

SECTIONAL VIEW

A MINIMUM HORIZONTAL SEPARATION OF 6' OUTSIDE TO OUTSIDE SHALL BE MAINTAINED BETWEEN RECLAIMED WATER LINES AND POTABLE WATER MAINS.

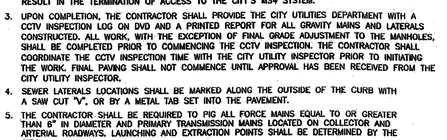

A MINIMUM HORIZONTAL SEPARATION OF 6' OUTSIDE TO OUTSIDE SHALL BE MAINTAINED BETWEEN RECLAIMED WATER LINES AND SEWER COLLECTION.

A MINIMUM HORIZONTAL SEPARATION OF 6' (OUTSIDE TO OUTSIDE), SHALL BE MAINTAINED BETWEEN SEWER COLLECTION LINES AND POTABLE WATER MAINS. *

NEW OR RELOCATED, UNDERGROUND WATER MAINS SHALL BE LAID TO PROVIDE A HORIZONTAL DISTANCE OF AT LEAST SIX FEET, AND PREFERABLY TEN FEET, BETWEEN THE OUTSIDE OF THE WATER MAIN AND THE OUTSIDE OF ANY EXISTING OR PROPOSED GRAVITY- OR PRESSURE-TYPE SANITARY SEWER, WASTEWATER FORCE MAIN, OR PIPELINE CONVEYING RECLAIMED WATER NOT REGULATED UNDER PART III OF CHAPTER 62-610, F.A.C. THE MINIMUM HORIZONTAL SEPARATION DISTANCE BETWEEN WATER MAINS AND GRAVITY-TYPE SANITARY SEWERS SHALL BE REDUCED TO THREE FEET WHERE THE BOTTOM OF THE WATER MAIN IS LAID AT LEAST SIX INCHES ABOVE THE TOP OF THE SEWER. NEW OR RELOCATED, UNDERGROUND WATER MAINS CROSSING ANY EXISTING OR PROPOSED GRAVITY- OR VACUUM-TYPE SANITARY SEWER SHALL BE LAID SO THE OUTSIDE OF THE WATER MAIN IS AT LEAST SIX INCHES, AND PREFERABLY 12 INCHES, ABOVE OR AT LEAST 12 INCHES BELOW THE OUTSIDE OF THE OTHER PIPELINE. HOWEVER, IT IS PREFERABLE TO LAY THE WATER MAIN ABOVE THE OTHER PIPELINE. NEW OR RELOCATED, UNDERGROUND WATER MAINS CROSSING ANY EXISTING OR PROPOSED PRESSURE-TYPE SANITARY SEWER, WASTEWATER OR STORM WATER FORCE MAIN, OR PIPELINE CONVEYING RECLAIMED WATER SHALL BE LAID SO THE OUTSIDE OF THE WATER MAIN IS AT LEAST 12 INCHES ABOVE OR BELOW THE OUTSIDE OF THE OTHER PIPELINE AND CONDUIT. HOWEVER, IT IS PREFERABLE TO LAY THE WATER MAIN ABOVE THE OTHER PIPELINE.

AT THE UTILITY CROSSINGS DESCRIBED ABOVE, ONE FULL LENGTH OF WATER MAIN PIPE SHALL BE CENTERED ABOVE OR BELOW THE OTHER PIPELINE SO THE WATER MAIN JOINTS WILL BE AS FAR AS POSSIBLE FROM THE OTHER PIPELINE. ALTERNATIVELY, AT SUCH CROSSINGS, THE PIPES SHALL BE ARRANGED SO THAT ALL WATER MAIN JOINTS ARE AT LEAST THREE FEET FROM ALL JOINTS IN VACUUM-TYPE SANITARY SEWERS, OR PIPELINES CONVEYING RECLAIMED WATER REGULATED UNDER PART III OF CHAPTER 62-610, F.A.C., AND AT LEAST SIX FEET FROM ALL JOINTS IN GRAVITY OR PRESSURE-TYPE SANITARY SEWERS, WASTEWATER FORCE MAINS, OR PIPELINES CONVEYING RECLAIMED WATER NOT REGULATED UNDER PART III OF CHAPTER 62-610, F.A.C.

NTS

THE CITY OF DAYTONA BEACH UTILITIES DEPARTMENT — PIPE SEPARATION DETAIL S-2

FY:	09/10
Drawing Date:	01/08
Drawn By:	NJH
Checked By:	JMP
Scale:	NTS
Revision Date:	05/10
File Name:	S-2

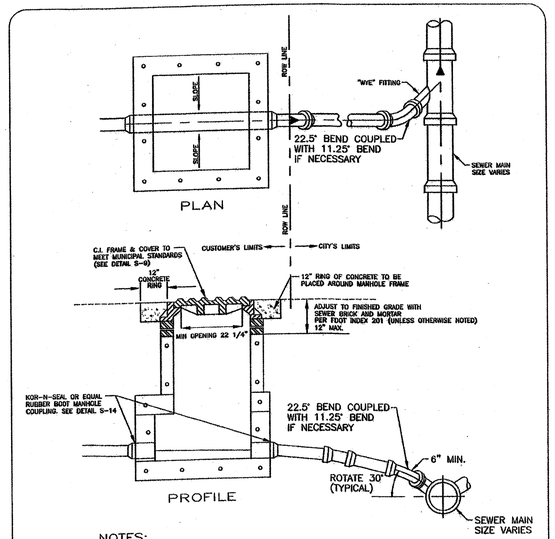

NOTES:
1. MANHOLE IS TO BE TYPE P (ALT A OR B) AND COMPLY WITH FDOT DESIGN STANDARDS INDEX 200 AND 201.
2. MANHOLE HEIGHT SHALL BE THREE TIMES THE OD OF THE LATERAL BUT NO LESS THAN 18".
3. WHEN VCP (CLAY) MAIN IS ENCOUNTERED UTILIZE A PVC WYE WITH TWO PVC TO VCP COUPLINGS FOR SERVICE CONNECTION

THE CITY OF DAYTONA BEACH UTILITIES DEPARTMENT — COMMERCIAL SANITARY LATERAL DETAIL S-3B

FY:	09/10
Drawing Date:	11/10
Drawn By:	NJH
Checked By:	JMP
Scale:	NTS
Revision Date:	
File Name:	S-3B

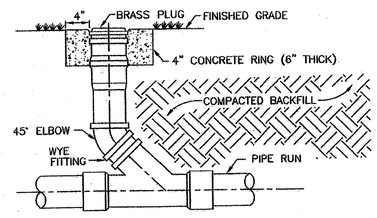

IN-LINE CLEANOUT

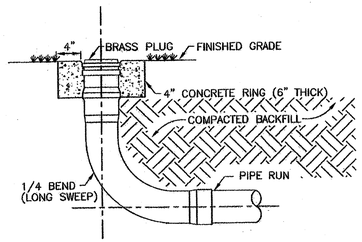

TERMINAL CLEANOUT

NOTE:
CONCRETE COLLAR REQUIRED IN UNPAVED AREAS

THE CITY OF DAYTONA BEACH UTILITIES DEPARTMENT — SANITARY LATERAL CLEANOUT DETAIL S-4

FY:	09/10
Drawing Date:	01/08
Drawn By:	NJH
Checked By:	JMP
Scale:	NTS
Revision Date:	
File Name:	S-4

Revised	Description of Revision	By
12/27/11	CITY STAFF COMMENTS	NM/DJ
10/04/11	CITY STAFF COMMENTS	NM/DJ

Daniel Johns, P.E.
Professional Engineers
3869 S. Nova Rd., Ste. #4, Port Orange, FL 32127
phone: 386-756-8582 / fax: 386-756-0617

SANITARY SEWER DETAILS

FRATERNAL ORDER OF EAGLES #4402
324 Beville Road
Daytona Beach, Volusia County, Florida 32114

DANIEL JOHNS LICENSE No 54037 STATE OF FLORIDA PROFESSIONAL ENGINEER 11-7-11

file: *	date: 06-15-11	scale: SHOWN	sheet 1 of 1